


CHIPPING HAMMER Thumb Trigger 15 lb SCH T 2,3&4

Dedicated to Quality....

....Committed to Support

Sullivan Palatek



SCH T-2, 3, and 4 " stroke chipper has a durable 4 bolt D handle and Thumb trigger for chipping concrete in parking garages, highway pillars and light demolition and building restoration.

- Machined from premium alloy steel
- Cast D handle with outside thumb trigger
- High shock tool steel piston
- Rotatable exhaust deflector
- Available with .580 hex or .680 round chucks
- Air Inlet 7/8" x 24 Fine
- Standard with oval collar retainer
- Optional Universal ball retainer available
- Optional whip hose with oiler available
- Optional 7/8" barbed swivel available
- One year Warranty
- Made in USA

NOTE: WHEN ORDERING TOOLS SPECIFY CHUCK AND RETAINER STYLE

KEEP TOOLS OILED, USE ISO 68 TOOL OIL (10w30 TOOL OIL) OR SULLIVAN PALATEK P/N SI 9016 BIO OIL ISO 68, MADE IN THE USA AND A RENEWABLE OIL SOURCE FORMULATED FOR FAST MOVING TOOLS AND INTRICATE VALVES IN CHIPPERS AND BUSTERS.

Specifications SCH T 4 bolt Chippers

	SCH-2		SCH-3		SCH-4	
Net Weight	13 lbs	6 kg	14 lbs	6.4 kg	15 lbs	7 kg
Length	14 in	356 mm	15.25 in	387 mm	17 in	432 mm
Bore	1.125 in	29 mm	1.125 in	29 mm	1.125 in	29 mm
Stroke	2 in	51 mm	3 in	75 mm	4 in	102 mm
Blows per minute	2300	2300	2200	2200	1800	1800
Chuck Sizes	.580 in Hex	14.8 mm Hex	.580 in Hex	14.8 mm Hex	.580 in Hex	14.8 mm Hex
	.680 in Rnd	17.5 mm Rnd	.680 in Rnd	17.5 mm Rnd	.680 in Rnd	17.5 mm Rnd
Air Inlet (NPT)	7/8 in Fine		7/8 in Fine		7/8 in Fine	
Air Consumption*	29.75 cfm	.84 m ³ /m	31.5 cfm	.89 m ³ /m	33.23 cfm	.94 m ³ /m

*estimated

WARNING:

ALWAYS DISCONNECT THE AIR SUPPLY BEFORE CHANGING CHISELS OR DISMANTLING THE TOOL FOR SERVICE OR REPAIR. FOR MAXIMUM SAFETY WE ADVISE THE INSTALLATION OF A SHUT-OFF VALVE AT THE END OF THE AIR LINE.

FOR OPTIMUM PERFORMANCE DO NOT OPOERATE TOOL ABOVE 90 PSI (6 BAR) DO NOT EXCEED 100 PSI (7BAR) WORKING PRESSURE.


Sullivan Palatek

1201 West US Highway 20
Michigan City, IN 46360

Ph: 800-438-6203
Fx: 800-725-6203

info@palatek.com
www.sullivanpalatek.com

PARTS LIST, CHIPPING HAMMER, Thumb Trigger SCH T 2,3&4

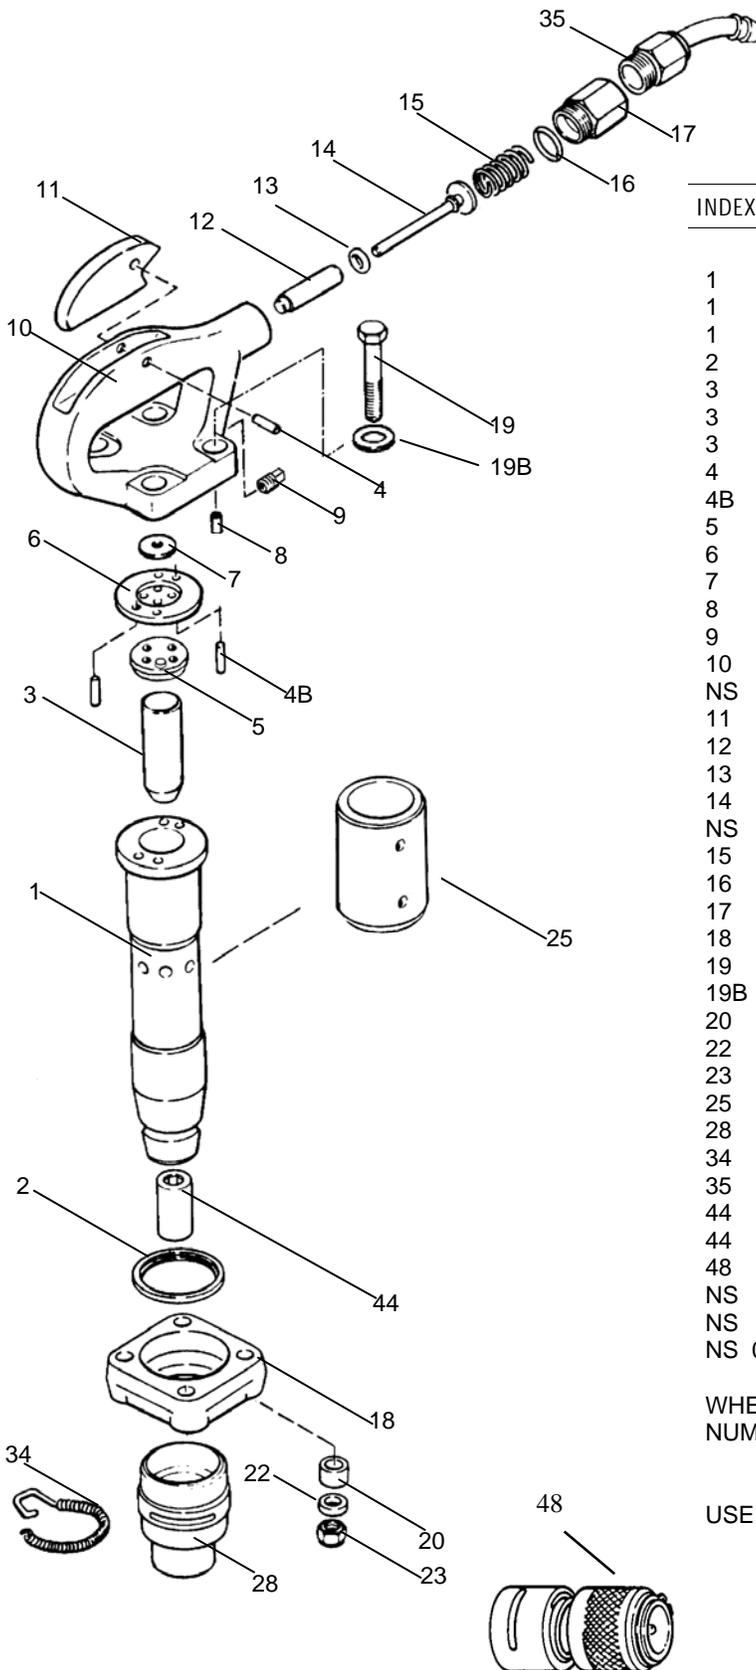

INDEX	PART	DESCRIPTION
1	SI6701-2	BARREL #2
1	SI6701-3	BARREL #3
1	SI6701-4	BARREL #4
2	SI6702	FLANGE BUMPER RING
3	SI6703-2	PISTON #2
3	SI6103-3	PISTON #3
3	SI6703-4	PISTON #4
4	SI6176	PIN, TRIGGER
4B	SI6704D	PIN, DOWEL (2)
5	SI6705	BUMPER VALVE SEAT
6	SI6706	VALVE SPACER
7	SI6707	VALVE PLATE
8	SI6708	AIR PLUG
9	SI6709	AIR PLUG
10	SI6710	HANDLE BARE (INCL.6712)
NS	SI6710-C	HANDLE COMPLETE
11	SI6177	TRIGGER (THUMB)
12	SI6712	THROTTLE VALVE BUSHING
13	SI6713	THROTTLE VALVE O-RING
14	SI6714	THROTTLE VALVE (ONE PIECE)
NS	SI6714-C	THROTTLE VALVE (INCL.6713)
15	SI6715	THROTTLE VALVE SPRING
16	SI6716	AIR INLET BUSHING O-RING
17	SI6717	AIR INLET (ACCEPTS 7/8 -24 SWIVEL)
18	SI6718	FLANGE
19	SI6719	HANDLE BOLT (4)
19B	SI6719B	SPRING WASHER (4)
20	SI6720	BUMPER WASHER (4)
22	SI6722	HANDLE BOLT SPACER (4)
23	SI6723	HANDLE BOLT NUT (4)
25	SI6725O	EXHAUST DEFLECTOR (URETHANE)
28	SI6128	RETAINER FOR OVAL COLLAR
34	SI6134	RETAINER SPRING
35	SI6135	AIR INLET SWIVEL, OPTIONAL
44	SI6144R	BUSHING FOR ROUND SHANK
44	SI6144H	BUSHING FOR HEX SHANK
48	SI6148	BALL RETAINER, OPTIONAL
NS	SI9016	BIO OIL, CHIPPER ISO 68 1 QUART
NS	SIL-5 WHIP	WHIP, 6' W/SWIVEL AND 2 LUG FTG
NS	05019902 0005	WHIP, 6' W/ PF OILER AND 2 LUG FTG

WHEN ORDERING PARTS FURNISH MODEL AND SERIAL NUMBER.

DO NOT EXCEED 90 PSI AT TOOL.

USE ISO GRADE 68 TOOL OIL (SEE P/N SI9016)

Sullivan
Palatek